

Specification Sheet

Terminal Pad Solderability:
 Meets EIA Specification RS186-9E
 And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:
 Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

α Alpha Logo
 100 Part Identification

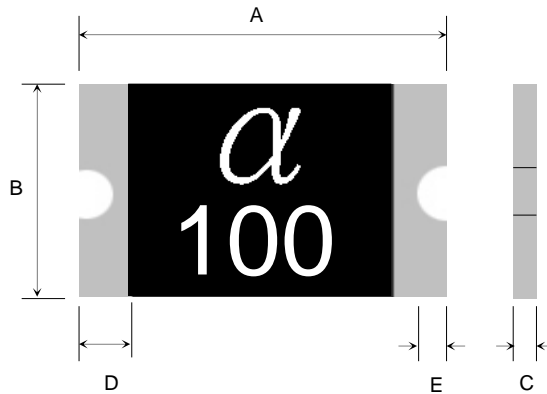


TABLE I. DIMENSIONS:

Model	A		B		C		D	E
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
SMD2018-030	4.72	5.44	4.22	4.93	0.60	1.10	0.30	0.25
SMD2018-050	4.72	5.44	4.22	4.93	0.60	1.30	0.30	0.25
SMD2018-100	4.72	5.44	4.22	4.93	0.60	1.10	0.30	0.25
SMD2018-100-33V	4.72	5.44	4.22	4.93	0.70	1.60	0.30	0.25
SMD2018-150	4.72	5.44	4.22	4.93	0.60	1.10	0.30	0.25
SMD2018-200	4.72	5.44	4.22	4.93	0.60	1.10	0.30	0.25

Unit:mm

TABLE II. PERFORMANCE RATINGS:

Model	V_{max} (V)	I_{max} (A)	I_{hold} @25°C (A)	I_{trip} @25°C (A)	P_d Typ. (W)	Maximum Time To Trip		Resistance	
						Current (A)	Time (Sec)	$R_{i_{min}}$ (Ω)	$R_{1_{max}}$ (Ω)
SMD2018-030	60	100	0.30	0.60	0.9	1.5	3.00	0.500	2.300
SMD2018-050	60	100	0.55	1.20	1.0	2.5	3.00	0.200	1.000
SMD2018-100	15	100	1.10	2.20	1.1	8.0	0.40	0.060	0.360
SMD2018-100-33V	33	100	1.10	2.20	1.1	8.0	0.40	0.060	0.360
SMD2018-150	15	100	1.50	3.00	1.1	8.0	0.80	0.050	0.170
SMD2018-200	10	100	2.00	4.00	1.1	8.0	2.40	0.030	0.100

Order Information

Packaging

SMD2018	100	-33V	Tape & Reel Quantity	
Product name	Hold	Max	030, 050	1,500 pcs/reel
Size 5045 mm / 2018 mils	Current	voltage	100, 100-33V, 150, 200	2,500 pcs/ree
SMD : surface mount device	0.50A			

Tape & reel packaging per EIA481-1

Recognition: UL Pending.