

Specification Sheet

Terminal Pad Solderability:
Meets EIA Specification RS186-9E
And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:
Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

α Alpha Logo
260L Part Identification

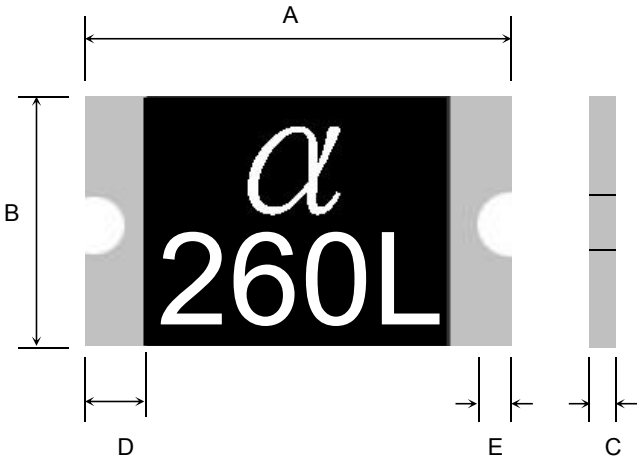


TABLE I. DIMENSIONS:

Model	A		B		C		D
	MIN	MAX	MIN	MAX	MIN	MAX	MIN
SMD260L	6.73	7.98	4.80	5.44	0.30	0.90	0.30

Unit:mm

TABLE II. PERFORMANCE RATINGS:

Model	V_{max} (V)	I_{max} (A)	I_{hold} @25°C (A)	I_{trip} @25°C (A)	P_d Typ. (W)	Maximum Time To Trip		Resistance	
						Current (A)	Time (Sec)	$R_{i_{min}}$ (Ω)	$R_{1_{max}}$ (Ω)
SMD260L	6	100	2.60	5.20	1.5	8.0	10.0	0.014	0.075

Order Information

Packaging

SMD2920		260		Tape & Reel Quantity	
Product name		Hold	Max	2000 pcs/reel	
Size 7555 mm / 2920 mils		Current	voltage		
SMD: surface mount device		2.60A			

Recognition: Agency Approved. E201504/E319079

Regulation/Standard: 2015/865/EU EN14582

