

SEA&LAND ELECTRONIC CORP.

13F., No.120-10,
 Sec. 3, Zhongshan Rd., Zhonghe Dist., New Taipei City 235,
 Taiwan
 Tel.: 886-2-8221-2567
 Fax.: 886-2-2225-7268

Techfuse
PTC Devices
 Resettable Fuse

PRODUCT: R60-010
 DOCUMENT: QR0429
 ECN. NO.:
 REV LETTER:
 REV DATE: 2020/12/23
 PAGE NO.: 1 of 1

Specification Sheet

Insulating Material:
 meets UL94 V-0 Requirements

Lead-free, RoHS compliant

Lead Material:
 Tin plated nickel-copper alloy, 24AWG (0.020"Dia)

Marking:

┌─── ChipFast Logo



- R60 - Radial type 60V
- 010 - hold current
- XXXX - Date code & Factory code

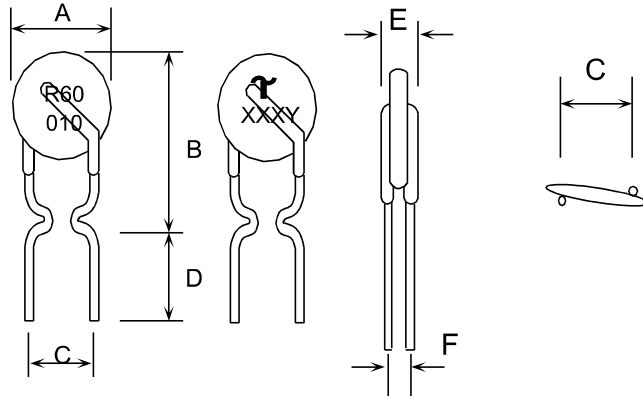


TABLE I. DIMENSIONS:

	A	B	C	D	E	F
	MAX	MAX	TYP	MIN	MAX	MAX
mm	7.4	12.7	5.1	7.6	3.1	1.0
in	0.29	0.50	0.20	0.30	0.12	0.04

TABLE II. PERFORMANCE RATINGS:

Model	V _{max} (Vdc)	I _{max} (A)	I _{hold} @25°C (A)	I _{trip} @25°C (A)	P _d Typ. (W)	Maximum Time To Trip		Resistance	
						Current (A)	Time (Sec)	R _{imin} (Ω)	R _{1max} (Ω)
R60-010	60	40	0.10	0.20	0.38	0.50	4.0	2,000	7,500

Order information

Packing

R60	010	K or S	R or U	Model	Reel Q'ty	Bag Q'ty
Radial type 60 V	Hold Current (A)	K=Kink leads S= Straight leads	R= Tape & Reel U= Bulk packaged	R60-010	3000	500

Tape & Reel packaging per EIA468-B stan

Recognition: UL/TÜV, approved.

E201504/E319079
R 50274672
2015/863/EU
EN14582

