

Specification Sheet

Terminal Pad Solderability:
Meets EIA Specification RS186-9E
And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:
Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

α

200L

Alpha Logo

Part Identification

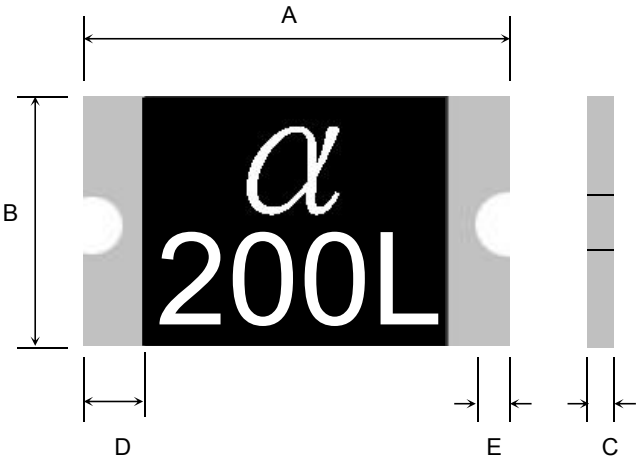


TABLE I. DIMENSIONS:

Model	A		B		C		D
	MIN	MAX	MIN	MAX	MIN	MAX	MIN
SMD200L	6.73	7.98	4.80	5.44	0.60	1.30	0.30

Unit:mm

TABLE II. PERFORMANCE RATINGS:

Model	V_{max} (V)	I_{max} (A)	I_{hold} @25°C (A)	I_{trip} @25°C (A)	P_d Typ. (W)	Maximum Time To Trip		Resistance	
						Current (A)	Time (Sec)	$R_{i_{min}}$ (Ω)	$R_{1_{max}}$ (Ω)
SMD200L	16	100	2.00	4.00	1.5	8.0	4.5	0.020	0.120

Order Information

Packaging

SMD2920		200	Tape & Reel Quantity	
Product name	Hold	Max	1500 pcs/reel	
Size 7555 mm / 2920 mils	Current	voltage		
SMD: surface mount device	2.00A			

Recognition:

AgencyApproved.

E201504/E319079

Regulation/Standard:

2015/865/EU

EN14582

