

Specification Sheet

Terminal Pad Solderability:
 Meets EIA Specification RS186-9E
 And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:
 Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

Part Identification
 1 = 010

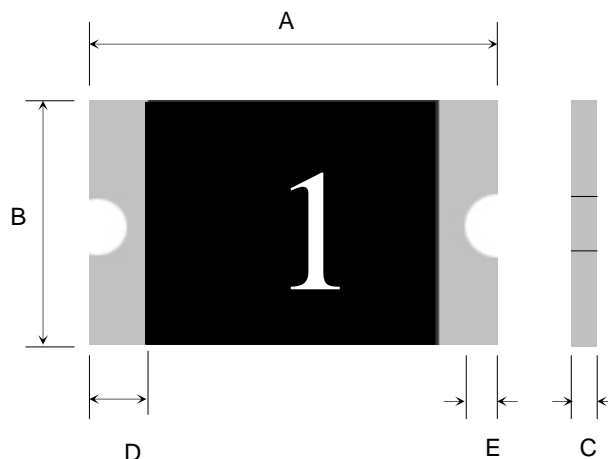


TABLE I. DIMENSIONS:

Model	Marking	A		B		C		D	E
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
SMD0805-010	1	2.00	2.20	1.20	1.50	0.50	1.00	0.20	0.10

Unit:mm

TABLE II. PERFORMANCE RATINGS:

Model	Marking	V_{max} (Vdc)	I_{max} (A)	I_{hold} @25°C (A)	I_{trip} @25°C (A)	P_d Typ. (W)	Maximum Time To Trip		Resistance	
							Current (A)	Time (Sec)	R_{1min} (Ω)	R_{1max} (Ω)
SMD0805-010	1	15.0	100	0.10	0.30	0.50	0.5	1.50	1.000	6.000

Order Information

Packaging

SMD0805	010	Tape & Reel Quantity	
Product name	Hold Max	5,000 pcs/reel	
Size 2012 mm / 0805 mils	Current voltage		
SMD: surface mount device	0.10A		

Recognition: UL Pending.