


Specification Sheet

Insulating Material:
Meets UL94 V-0 Requirements

Lead-Free, RoHS Compliant

Lead Material:
Tin Plated Copper-Clad Steel, 24AWG (0.51mm/0.020"Dia)

Marking:

- Sea&Land Logo
-  R16 - Radial Type 16V
- 135 - Hold Current
- XXXX - Date Code & Factory Code

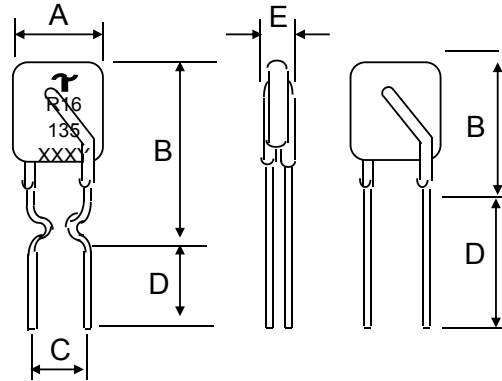


TABLE I. DIMENSIONS:

	A	B	C	D	E
	Max.	Max.	Typ.	Min.	Max.
mm	8.9	13.5	5.1	7.6	3.1
in	0.35	0.53	0.20	0.30	0.12

TABLE II. PERFORMANCE RATINGS:

Model Number	V _{max} (Vdc)	I _{max} (A)	I _{hold} @25°C (A)	I _{trip} @25°C (A)	P _d Max. (W)	Maximum Time To Trip		Resistance	
						Current (A)	Time (Sec)	R _{imin} (Ω)	R _{1max} (Ω)
R16-135	16	100	1.35	2.70	0.80	8.00	4.5	0.040	0.120

Order Information

Packing

R16	135	K or S	R or U	Model	Reel Q'ty	Bag Q'ty
Radial type 30 V	Hold Current (A)	K= Kink leads S= Straight leads	R= Tape & reel U= Bulk packaged	R16-135	3000	500

Tape & Reel packaging per EIA468-B stan

Recognition:

2015/863/EU
EN14582

