

Sea & Land Integrated Corp.

12F, 171-1 Sec. 2, Ta-Tung Road,
Hsi-Chih City, Taipei Hsien,
Taiwan, R.O.C.

Tel.: 886-2-8692-6001
Fax.: 886-2-8692-6080

Techfuse
PTC Devices
Resettable Fuse

PRODUCT: R16-1600
DOCUMENT: QR0429
ECN. NO.:
REV LETTER:
REV DATE: 2020/12/16
PAGE NO.: 1 of 1

Specification Sheet

Insulating Material:
Meets UL94 V-0 Requirements

Lead-Free, RoHS Compliant

Lead Material:
Tin Plated Copper, 18 AWG (1.0mm/0.04" Dia.)

Marking:

Sea&Land Logo

R16 - Radial Type 16V

1600 - Hold Current

XXXY - Date Code & Factory Code

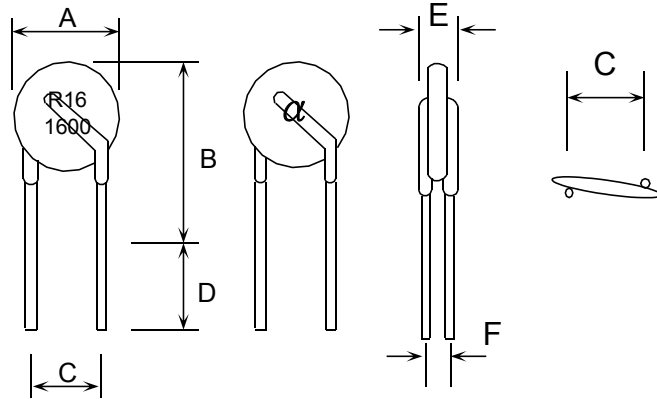


TABLE I. DIMENSIONS:

	A	B	C	D	E
	Max.	Max.	Typ.	Min.	Max.
mm	24.1	29.7	10.2	7.6	3.1
in	0.95	1.17	0.40	0.30	0.12

TABLE II. PERFORMANCE RATINGS:

Model Number	V _{max} (Vdc)	I _{max} (A)	I _{hold} @25°C (A)	I _{trip} @25°C (A)	P _d Max. (W)	Maximum Time To Trip		Resistance	
						Current (A)	Time (Sec)	R _{imin} (Ω)	R _{1max} (Ω)
R16-1600	16	100	16.00	27.20	4.80	80.00	10.0	0.0026	0.0080

Recognition:

2015/863/EU
EN14582

