

SEA&LAND ELECTRONIC CORP.

13F.,No.120-10,
 Sec.3,Zhongshan Rd.,Zhonghe City,Taipei County,
 Taiwan, R.O.C.
 Tel.: 886-2-8221-2567
 Fax.: 886-2-2225-7268

Techfuse
PTC Devices
Resettable Fuse

PRODUCT: SMD1210-150
 DOCUMENT: QR0429
 ECN. NO.:
 REV LETTER:
 REV DATE: 2011-3-10
 PAGE NO.: 1 of 1

Specification Sheet

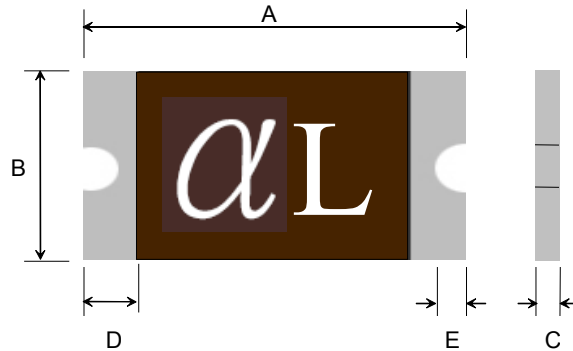
Terminal Pad Solderability:
 Meets EIA Specification RS186-9E
 And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:
 Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

Part Identification
 SMD1210-150 = α L

**TABLE I. DIMENSIONS:**

Model	Marking	A		B		C		D	Unit:mm
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	
SMD1210-150	α L	3.00	3.43	2.35	2.80	0.40	0.80	0.30	

TABLE II. PERFORMANCE RATINGS:

Model	Marking	V_{max} (V)	I_{max} (A)	I_{hold} @25°C (A)	I_{trip} @25°C (A)	P_d Typ. (W)	Maximum Time To Trip		Resistance		
							Current (A)	Time (Sec)	$R_{l_{min}}$ (Ω)	$R_{l_{typ}}$ (Ω)	$R_{l_{max}}$ (Ω)
SMD1210-150	α L	6	100	1.50	3.00	0.6	8.0	0.50	0.030	0.070	0.110

Order Information**Packaging**

SMD1210	150	Tape & Reel Quantity	
Product name	Hold	Max	
Size 3225 mm / 1210 mils	Current	voltage	150 4500 pcs/reel
SMD: surface mount device	1.50A		

Recognition: UL Pending.