

SEA&LAND ELECTRONIC CORP.

13F.,No.120-10,
 Sec.3,Zhongshan Rd.,Zhonghe City,Taipei County,
 Taiwan, R.O.C.
 Tel.: 886-2-8221-2567
 Fax.: 886-2-2225-7268

Techfuse
PTC Devices
 Resettable Fuse

PRODUCT: C250-060
 DOCUMENT: QR0429
 ECN. NO.:
 REV LETTER:
 REV DATE: 2015/11/10
 PAGE NO.: 1 of 1

Specification Sheet

Insulating Material:
 meets UL94 V-0 Requirements

Lead-free, RoHS compliant

Lead Material:
 Tin plated copper, 0.6 Dia.

Marking:

└── Sea&Land Logo
 ↑

C250 - Vmax 250V
 060 - hold current
 XXX - Date code

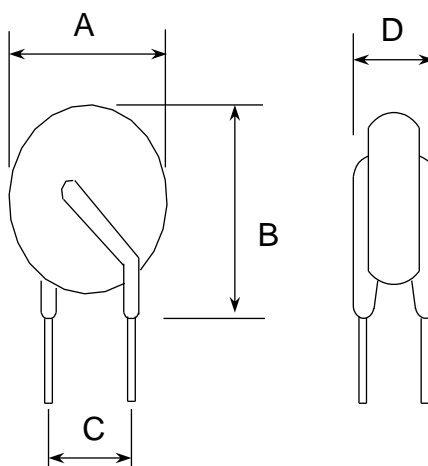


TABLE I. DIMENSIONS:

| | A | B | C | D |
|----|-----|-----|-----|-----|
| | MAX | MAX | TYP | MAX |
| mm | 6.5 | 9.0 | 5.1 | 4.6 |

TABLE II. PERFORMANCE RATINGS:

| Model | V _{max} (Vac) | I _{max} (A) | I _{hold} @25°C (A) | Maximum Time To Trip | | Resistance | |
|----------|---------------------------|-------------------------|-----------------------------------|-------------------------|---------------|---------------|---------------|
| | | | | Current (A) | Time (Sec) | Ri min (Ω) | Ri max (Ω) |
| C250-060 | 250 | 3 | 0.06 | 0.35 | 2.0 | 20.00 | 45.00 |

Order Information

Packing

| C250 | 060 | Model | Bag Q`ty |
|--------------|--------------|----------|----------|
| Product name | Hold Current | C250-060 | 1000 |
| 250V | mA | | |

Recognition: UL/ TÜV, pending.