

SEA&LAND ELECTRONIC CORP.
 13F., No.120-10,
 Sec. 3, Zhongshan Rd., Zhonghe Dist., New Taipei City 235,
 Taiwan
 Tel.: 886-2-8221-2567
 Fax.: 886-2-2225-7268

Techfuse
PTC Devices
 Resettable Fuse

PRODUCT: SMD2018-030
 DOCUMENT: QR0429
 ECN. NO.:
 REV LETTER:
 REV DATE: 2014/12/27
 PAGE NO.: 1 of 1

Specification Sheet

Terminal Pad Solderability:
 Meets EIA Specification RS186-9E
 And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:
 Gold-Plated Nickel-Copper or Tin-plated Nickel-Copper

Tin-plated Nickel-Copper

Marking:

α Alpha Logo
 030 Part Identification

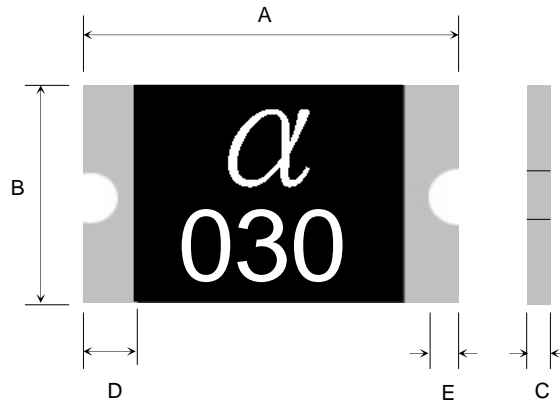


TABLE I. DIMENSIONS:

Model	A		B		C		D	E
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
SMD2018-030	4.72	5.44	4.22	4.93	0.60	1.10	0.30	0.25

Unit:mm

TABLE II. PERFORMANCE RATINGS:

Model	V_{max} (V)	I_{max} (A)	I_{hold} @25°C (A)	I_{trip} @25°C (A)	P_d Typ. (W)	Maximum Time To Trip		Resistance	
						Current (A)	Time (Sec)	R_{1min} (Ω)	R_{1max} (Ω)
SMD2018-030	60	100	0.30	0.60	0.9	1.5	3.00	0.500	2.300

Order Information

Packaging

SMD2018	030	Tape & Reel Quantity	
Product name	Hold	Max	1500 pcs/reel
Size 5045 mm / 2018 mils	Current	voltage	
SMD: surface mount device	0.30A		

Recognition: UL Pending.