

**SEA&LAND ELECTRONIC CORP.**  
 13F., No.120-10,  
 Sec. 3, Zhongshan Rd., Zhonghe Dist., New Taipei City 235,  
 Taiwan  
 Tel.: 886-2-8221-2567  
 Fax.: 886-2-2225-7268

**Techfuse**  
**PTC Devices**  
 Resettable Fuse

PRODUCT: SMD0805-005-60V  
 DOCUMENT: QR0429  
 ECN. NO.:  
 REV LETTER: A  
 REV DATE: 2023-1-3  
 PAGE NO.: 1 of 1


## Specification Sheet

Terminal Pad Solderability:  
 Meets EIA Specification RS186-9E  
 And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:  
 Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:  
 Part Identification  
 v = 005

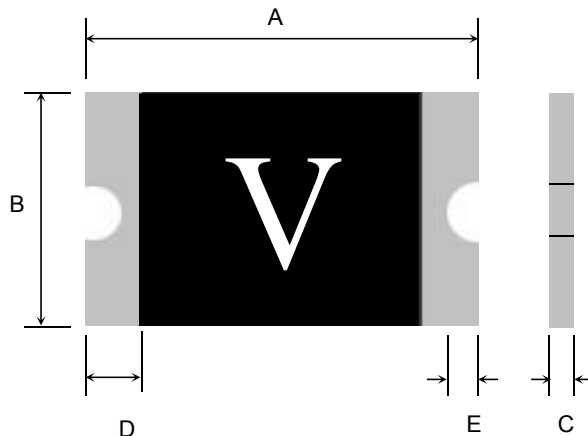

**TABLE I. DIMENSIONS:**

Model	Marking	A		B		C		D	E
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
SMD0805-005-60V	V	1.90	2.20	1.20	1.50	0.60	1.50	0.20	0.10

Unit:mm

**TABLE II. PERFORMANCE RATINGS:**

Model	Marking	$V_{max}$ (Vdc)	$I_{max}$ (A)	$I_{hold}$ @25°C (A)	$I_{trip}$ @25°C (A)	$P_d$ Typ. (W)	Maximum Time To Trip		Resistance	
							Current (A)	Time (Sec)	$R_{i_{min}}$ (Ω)	$R_{1_{max}}$ (Ω)
SMD0805-005-60V	V	60	100	0.05	0.20	0.5	0.5	1.50	2.000	10.000

### Order Information

### Packaging

SMD0805	005-60V	Tape & Reel Quantity
Product name	Hold	Max
Size 2012 mm / 0805 mils	Current	voltage
SMD: surface mount device	0.05A	4,000 pcs/reel

Recognition: UL approved. E201504/E319079



2015/863/EU



EN14582

