

SEA&LAND ELECTRONIC CORP.

13F., No.120-10,
Sec. 3, Zhongshan Rd., Zhonghe Dist., New Taipei City 235,
Taiwan

Tel.: 886-2-8221-2567
Fax.: 886-2-2225-7268

Techfuse
PTC Devices
Resettable Fuse


PRODUCT: R60-010
DOCUMENT: QR0429
ECN. NO.:
REV LETTER:
REV DATE: 2014/12/30
PAGE NO.: 1 of 1

Specification Sheet

Insulating Material:
meets UL94 V-0 Requirements

Lead-free, RoHS compliant

Lead Material:
Tin plated nickel-copper alloy, 24AWG (0.020"Dia)

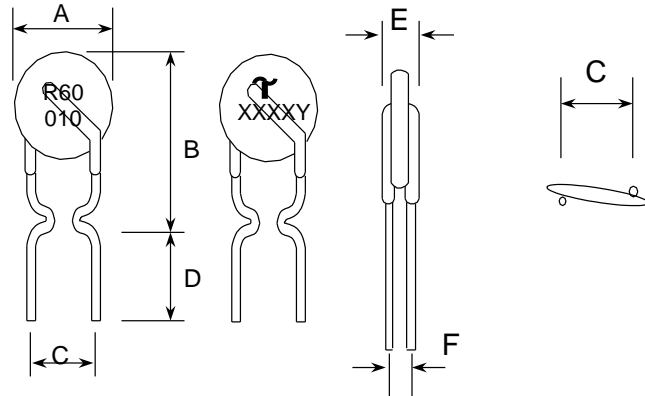

Marking:

- ChipFast Logo
- T**
- R60 — Radial type 60V
- 010 — hold current
- XXXXY — Date code & Factory code

TABLE I. DIMENSIONS:

	A	B	C	D	E	F
	MAX	MAX	TYP	MIN	MAX	MAX
mm	7.4	12.7	5.1	7.6	3.1	1.0

TABLE II. PERFORMANCE RATINGS:

Model	V _{max} (Vdc)	I _{max} (A)	I _{hold} @25°C (A)	I _{trip} @25°C (A)	P _d Typ. (W)	Maximum Time To Trip		Resistance		
						Current (A)	Time (Sec)	R _{imin} (Ω)	R _{imax} (Ω)	R _{1max} (Ω)
R60-010	60	40	0.10	0.20	0.38	0.50	4.0	2.50	4.50	7.50

Order information

Packing

R60	010	K or S	R or U	Model	Reel Q'ty	Bag Q'ty
Radial type 60 V	Hold Current 0.10(A)	K=Kink leads S=Straight leads	R= Tape & Reel U= Bulk packaged	R60-010	3000	500

Tape & Reel packaging per EIA468-B stan

Recognition UL / TÜV, approved. UL FILE NO. E201504/E319079; TUV FILE R 50274672

