

**SEA&LAND ELECTRONIC CORP.**  
 13F., No.120-10,  
 Sec. 3, Zhongshan Rd., Zhonghe Dist., New Taipei City 235,  
 Taiwan  
 Tel.: 886-2-8221-2567  
 Fax.: 886-2-2225-7268

**Techfuse**  
**PTC Devices**  
 Resettable Fuse

PRODUCT: SMD2018-150  
 DOCUMENT: QR0429  
 ECN. NO.:  
 REV LETTER:  
 REV DATE: 2025/9/25  
 PAGE NO.: 1 of 1

## Specification Sheet

Terminal Pad Solderability:  
 Meets EIA Specification RS186-9E  
 And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:  
 Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

$\alpha$  Alpha Logo  
 150 Part Identification

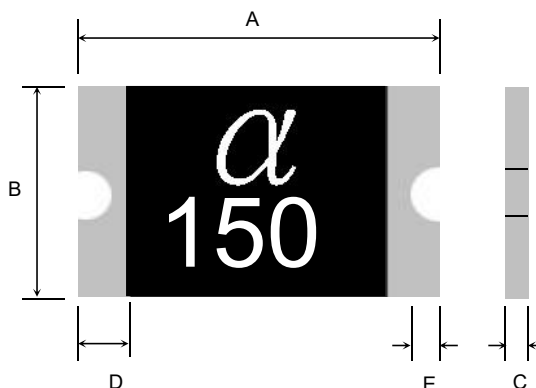


TABLE I. DIMENSIONS:

Model	A		B		C		D
	Min.	Max.	Min.	Max.	Min.	Max.	Min.
SMD2018-150	4.72	5.44	4.22	4.93	0.45	0.80	0.30

Unit:mm

TABLE II. PERFORMANCE RATINGS:

Model	$V_{max}$ (V)	$I_{max}$ (A)	$I_{hold}$ @25°C (A)	$I_{trip}$ @25°C (A)	$P_d$ Typ. (W)	Maximum Time To Trip		Resistance	
						Current (A)	Time (Sec)	$R_{i_{min}}$ ( $\Omega$ )	$R_{1_{max}}$ ( $\Omega$ )
SMD2018-150	15	100	1.50	3.00	1.1	8.0	0.80	0.050	0.170

### Order Information

### Packaging

SMD2018	150	Tape & Reel Quantity	
Product name	Hold	Max	
Size 5045 mm / 2018 mils	Current	voltage	2500 pcs/reel
SMD: surface mount device	1.50A		

Agency Approvals :



CQC25001473187

GB 4943.1-2022;IEC 60730-1 : 2013 15、17、J.15、J.17;GB/T 7153-2002

Regulation/Standard:



2015/863/EU



EN14582