

Specification Sheet

Terminal Pad Solderability:
Meets EIA Specification RS186-9E
And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:
Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:
Part Identification

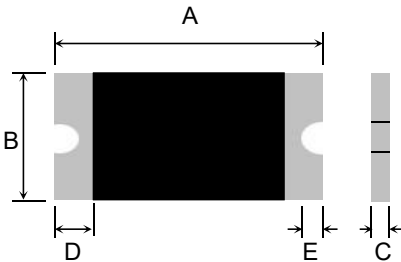


TABLE I. DIMENSIONS:

Model	A		B		C		D	E
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
SL1206150	3.00	3.50	1.50	1.90	0.40	0.80	0.25	0.10

Unit:mm

TABLE II. PERFORMANCE RATINGS:

Model	V _{max} (Vdc)	I _{max} (A)	I _{hold} @25°C (A)	I _{trip} @25°C (A)	P _d Typ. (W)	Maximum Time To Trip		Resistance	
						Current (A)	Time (Sec)	R _{i_min} (Ω)	R _{1_max} (Ω)
SL1206150	6	50	1.5	3.5	1.2	8.0	5.0	0.006	0.060

Order Information

Packaging

SL1206	150	Tape & Reel Quantity	
Product name	Hold	Max	
Size 3216 mm / 1206 mils	Current	voltage	4000 pcs/reel
SL: surface mount device	1.50A		

Recognition:

2015/863/EU

EN14582

