

Specification Sheet

Terminal Pad Solderability:
 Meets EIA Specification RS186-9E
 And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:
 Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

Alpha Logo
 Part Identification

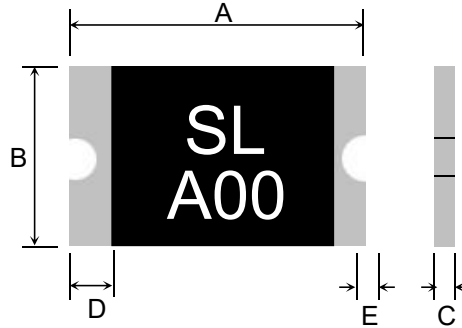


TABLE I. DIMENSIONS:

Model	A		B		C		D	E
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
SL18121000	4.37	4.73	3.07	3.41	0.60	1.30	0.30	0.15

Unit:mm

TABLE II. PERFORMANCE RATINGS:

Model	Marking	V_{max} (V)	I_{max} (A)	I_{hold} @25°C (A)	I_{trip} @25°C (A)	P_d Typ. (W)	Maximum Time To Trip		Resistance	
							Current (A)	Time (Sec)	$R_{i_{min}}$ (Ω)	$R_{1_{max}}$ (Ω)
SL18121000	SLA00	6	50	10.00	20.00	2.0	50.0	5.0	0.0005	0.0030

Order Information

Packaging

SL1812	1000	Tape & Reel Quantity	
Product name	Hold	Max	1500 pcs/reel
Size 4532 mm /1812 mils	Current	voltage	
SL: surface mount device	10.00A		

Recognition:

2015/863/EU

EN14582

