

**SEA&LAND ELECTRONIC CORP.**

13F., No.120-10,  
 Sec. 3, Zhongshan Rd., Zhonghe Dist., New Taipei City 235,  
 Taiwan  
 Tel.: 886-2-8221-2567  
 Fax.: 886-2-2225-7268

**Techfuse**  
**PTC Devices**  
 Resettable Fuse

PRODUCT: nSMD050-16V  
 DOCUMENT: QR0429  
 ECN. NO.:  
 REV LETTER:  
 REV DATE: 2020/12/2  
 PAGE NO.: 1 of 1

# Specification Sheet


Terminal Pad Solderability:  
 Meets EIA Specification RS186-9E  
 And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:  
 Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

nSMD050 = α F

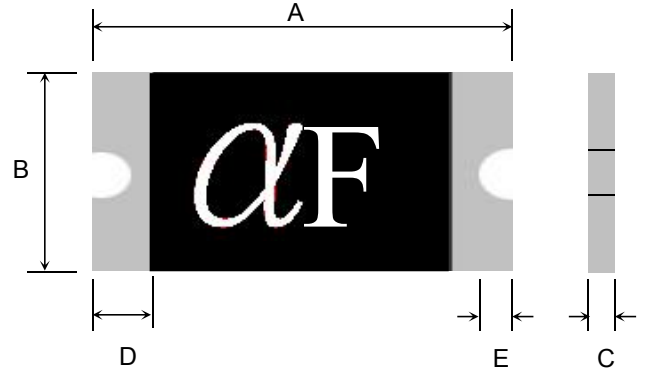

Model	Marking	A		B		C		D	E
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
nSMD050-16V	α F	3.00	3.50	1.50	1.80	0.50	1.20	0.15	0.10

Unit:mm

TABLE II. PERFORMANCE RATINGS:

Model	Marking	$V_{max}$ (Vdc)	$I_{max}$ (A)	$I_{hold}$ @25°C (A)	$I_{trip}$ @25°C (A)	$P_d$ Typ. (W)	Maximum Time To Trip		Resistance		
							Current (A)	Time (Sec)	$R_{i_{min}}$ (Ω)	$R_{i_{typ}}$ (Ω)	$R_{1_{max}}$ (Ω)
nSMD050-16V	α F	13.2	100	0.50	1.00	0.6	8.0	0.10	0.150		0.700

## Order Information

## Packaging

SMD1206	050	-16V	Tape & Reel Quantity
Product name	Hold	Max	3500 pcs/reel
Size 3216 mm / 1206 mils	Current	voltage	
SMD: surface mount device	0.50A		

Recognition: UL Approved.

E201504/E319079

