

## Specification Sheet

Terminal Pad Solderability:  
 Meets EIA Specification RS186-9E  
 And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:  
 Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

Alpha Logo  
 Part Identification

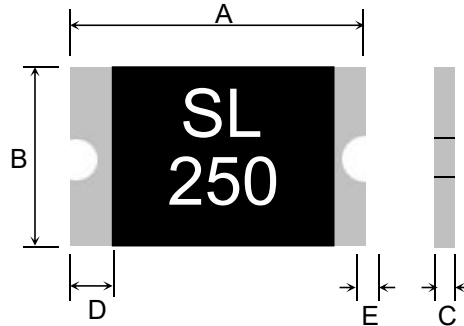


TABLE I. DIMENSIONS:

Model	A		B		C		D	E
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
SL1812250-12V	4.37	4.73	3.07	3.41	0.40	0.70	0.30	0.15

Unit:mm

TABLE II. PERFORMANCE RATINGS:

Model	Marking	$V_{max}$ (V)	$I_{max}$ (A)	$I_{hold}$ @25°C (A)	$I_{trip}$ @25°C (A)	$P_d$ Typ. (W)	Maximum Time To Trip		Resistance	
							Current (A)	Time (Sec)	$R_{i_{min}}$ (Ω)	$R_{1_{max}}$ (Ω)
SL1812250-12V	SL260	12	50	2.50	6.00	1.0	13.0	2.0	0.0040	0.0200

### Order Information

### Packaging

SL1812	250-12V	Tape & Reel Quantity
Product name	Hold	Max
Size 4532 mm /1812 mils	Current	voltage
SL: surface mount device	2.50A	1500 pcs/reel

Recognition:

2015/863/EU



EN14582

