

**SEA&LAND ELECTRONIC CORP.**

13F., No.120-10,  
 Sec. 3, Zhongshan Rd., Zhonghe Dist., New Taipei City 235,  
 Taiwan  
 Tel.: 886-2-8221-2567  
 Fax.: 886-2-2225-7268

**Techfuse**  
**PTC Devices**  
 Resettable Fuse

PRODUCT: mSMD030  
 DOCUMENT: QR0429  
 ECN. NO.:  
 REV LETTER:  
 REV DATE: 2020/12/2  
 PAGE NO.: 1 of 1

# Specification Sheet


Terminal Pad Solderability:  
 Meets EIA Specification RS186-9E  
 And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:  
 Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

$\alpha$  Alpha Logo  
 030 Part Identification

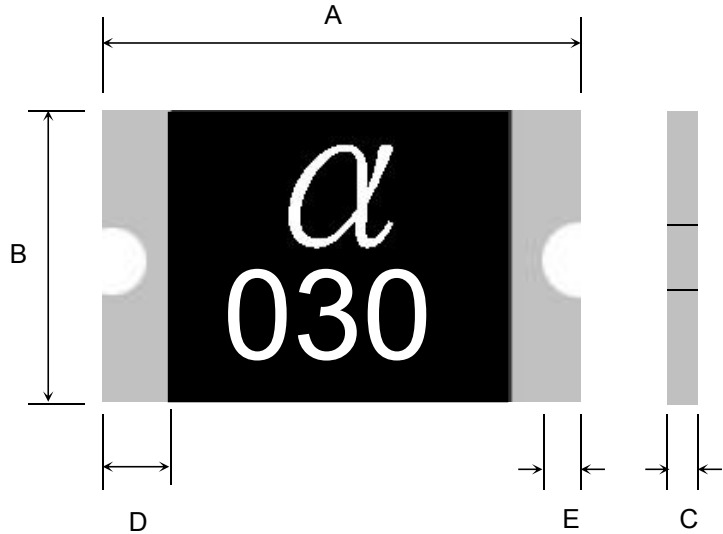

**TABLE I. DIMENSIONS:**

Model	A		B		C		D	E
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
mSMD030	4.37	4.73	3.07	3.41	0.50	1.00	0.30	0.25

Unit:mm

**TABLE II. PERFORMANCE RATINGS:**

Model	$V_{max}$ (V)	$I_{max}$ (A)	$I_{hold}$ @25°C (A)	$I_{trip}$ @25°C (A)	$P_d$ Typ. (W)	Maximum Time To Trip		Resistance		
						Current (A)	Time (Sec)	$R_{i_{min}}$ ( $\Omega$ )	$R_{i_{typ}}$ ( $\Omega$ )	$R_{1_{max}}$ ( $\Omega$ )
mSMD030	30.0	100	0.30	0.60	0.8	8.0	0.10	0.250	0.350	3.000

mSMD1812	030	Tape & Reel Quantity	
Product name	Hold	Max	1500 pcs/reel
Size 4532 mm / 1812 mils	Current	voltage	
SMD: surface mount device	0.30A		

Recognition: UL/TUV Approved. E201504/E319079

R 50481056

