

SEA&LAND ELECTRONIC CORP.
 13F., No.120-10,
 Sec. 3, Zhongshan Rd., Zhonghe Dist.,New Taipei City 235,
 Taiwan
 Tel.: 886-2-8221-2567
 Fax.: 886-2-2225-7268

Techfuse
PTC Devices
 Resettable Fuse

PRODUCT: SL1206400-8V
 DOCUMENT: QR0429
 ECN. NO.:
 REV LETTER:
 REV DATE: 2023-6-26
 PAGE NO.: 1 of 1

Specification Sheet

Terminal Pad Solderability:
 Meets EIA Specification RS186-9E
 And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:
 Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:
 Part Identification

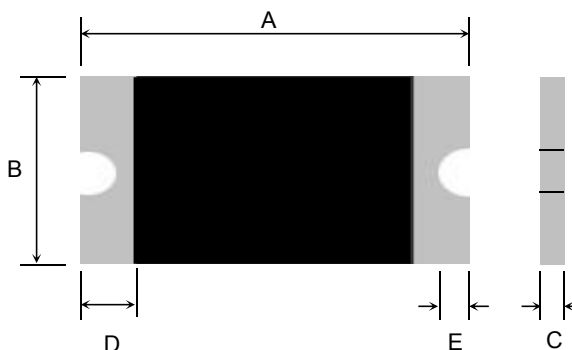


TABLE I. DIMENSIONS:

Model	Marking	A		B		C		D	E
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
SL1206400-8V		3.00	3.50	1.50	1.85	0.50	1.00	0.25	0.10

Unit:mm

TABLE II. PERFORMANCE RATINGS:

Model	Marking	V_{max} (Vdc)	I_{max} (A)	I_{hold} @25°C (A)	I_{trip} @25°C (A)	P_d Typ. (W)	Maximum Time To Trip		Resistance	
							Current (A)	Time (Sec)	$R_{i_{min}}$ (Ω)	$R_{1_{max}}$ (Ω)
SL1206400-8V		8	50	4.00	8.00	1.5	16.0	5.0	0.0010	0.0160

Order Information

Packaging

SL1206	400-8V	Max	Tape & Reel Quantity
Product name	Hold	voltage	4000 pcs/reel
Size 3216 mm / 1206 mils	Current		
SL: surface mount device	4.00A		

Recognition: UL Approved. **E201504/E319079**



2015/863/EU



EN14582

