

Specification Sheet

Terminal Pad Solderability:
 Meets EIA Specification RS186-9E
 And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:
 Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

Part Identification

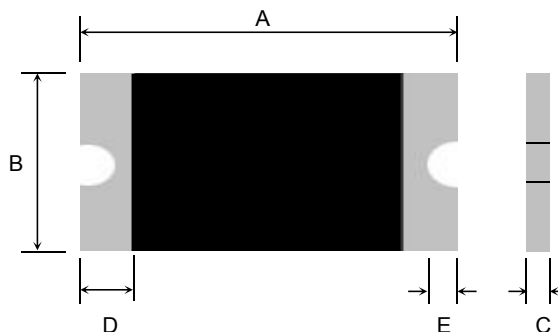


TABLE I. DIMENSIONS:

Model	Marking	A		B		C		D	D
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
SL1210650-126V		3.00	3.50	2.35	2.90	0.60	1.40	0.30	0.10

Unit:mm

TABLE II. PERFORMANCE RATINGS:

Model	Marking	V_{max} (V)	I_{max} (A)	I_{hold} @25°C (A)	I_{trip} @25°C (A)	P_d Typ. (W)	Maximum Time To Trip		Resistance	
							Current (A)	Time (Sec)	$R_{i_{min}}$ (Ω)	$R_{1_{max}}$ (Ω)
SL1210650-126V		16	50	6.50	13.00	1.5	20.0	5.0	0.0005	0.0080

Order Information

Packaging

SL1210	650-16V	Tape & Reel Quantity
Product name	Hold	Max
Size 3225 mm / 1210 mils	Current	voltage
SL: surface mount device	6.50A	3000 pcs/reel

Recognition:

E201504/E319079



2015/863/EU



EN14582

