

Specification Sheet

Terminal Pad Solderability:
 Meets EIA Specification RS186-9E
 And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:
 Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

α Alpha Logo
 075 Part Identification

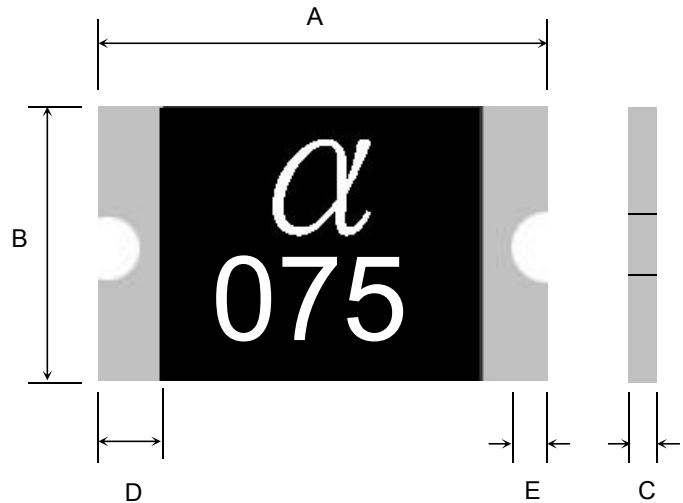


TABLE I. DIMENSIONS:

Model	A		B		C		D	E
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
mSMD075-16V	4.37	4.73	3.07	3.41	0.40	0.90	0.30	0.25

Unit:mm

TABLE II. PERFORMANCE RATINGS:

Model	V_{max} (V)	I_{max} (A)	I_{hold} @25°C (A)	I_{trip} @25°C (A)	P_d Typ. (W)	Maximum Time To Trip		Resistance	
						Current (A)	Time (Sec)	$R_{i_{min}}$ (Ω)	$R_{1_{max}}$ (Ω)
mSMD075-16V	16.0	100	0.75	1.50	0.8	8.0	0.20	0.090	0.450

Order Information

Packaging

mSMD1812	075-16v	Tape & Reel Quantity
Product name	Hold	Max
Size 4532 mm /1812 mils	Current	voltage
SMD: surface mount device	0.75A	1500 pcs/reel

Recognition: TUV, Approvals

R 50481056
 2015/863/EU
 EN14582

